


# Fitting Instructions


Model: 03BS



Parts:

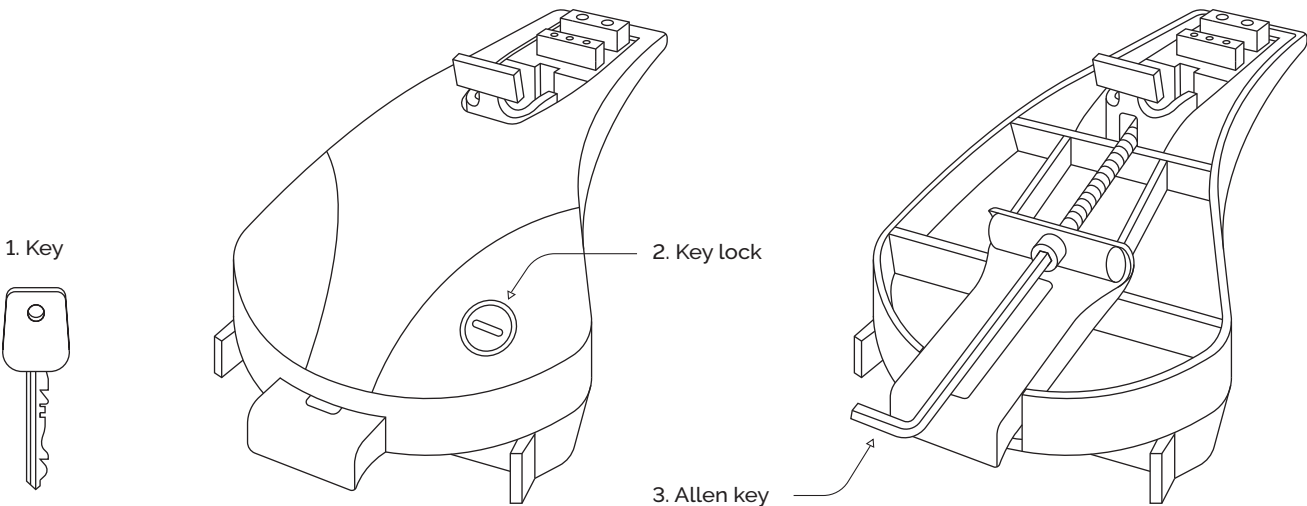


Bar types:

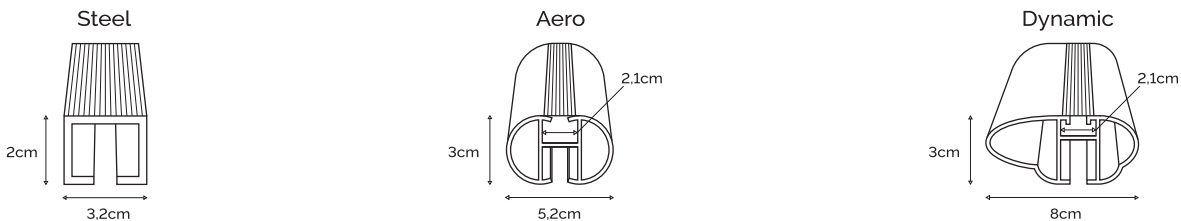

Please use additional rubber and fill in visible slots underneath the bar.


Rails types:

Flush rails

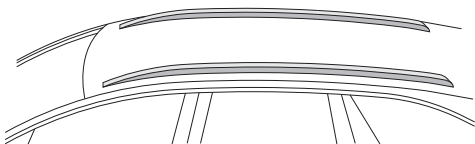


This product is universal and does not use any assembly point.


Manual:

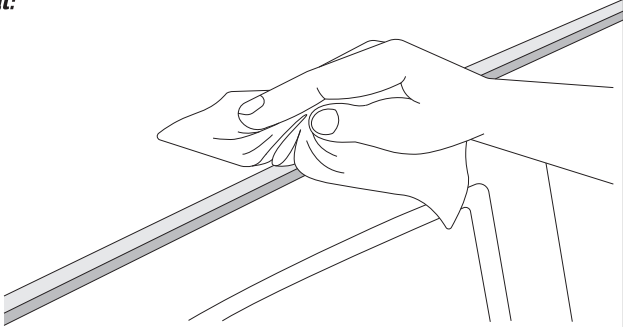


1 Clean a place of assembly.

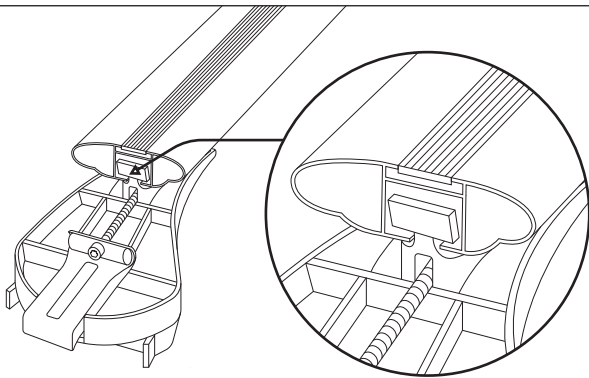


2 Remove the end caps from bars. Open clamp mechanism using allen key.

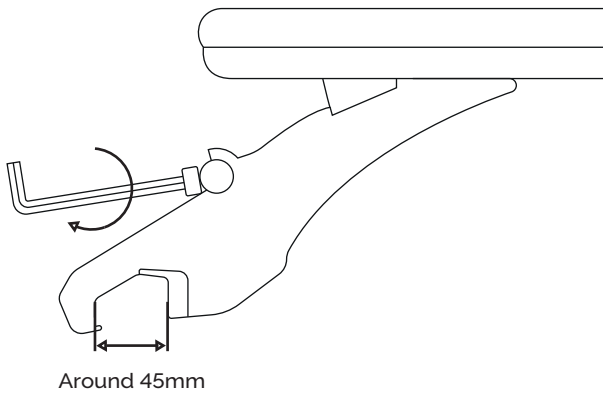


- 3 Slide onto bar. Centralise bars on the vehicle, provide a symetrical crossbar position.

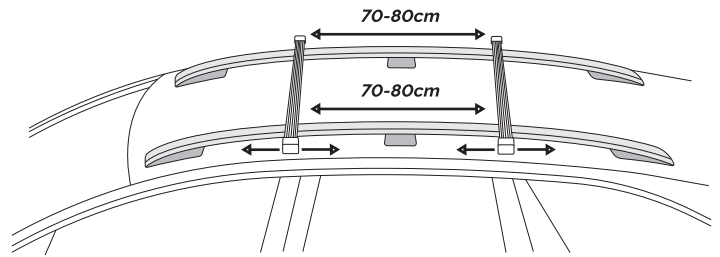

- 4 To minimize the noise please set the bars forward or back while maintaining a distance of 70-80cm between bars.

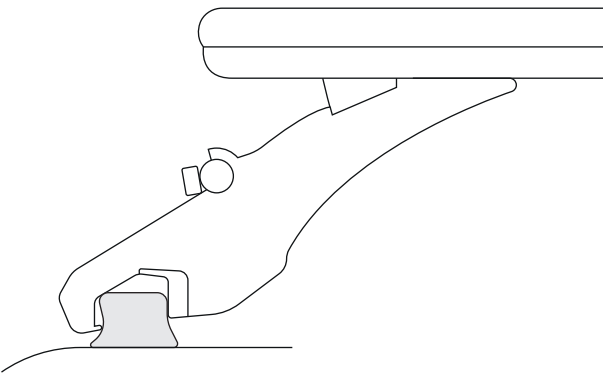

- 5 Strongly tighten the bolt and replace end caps.

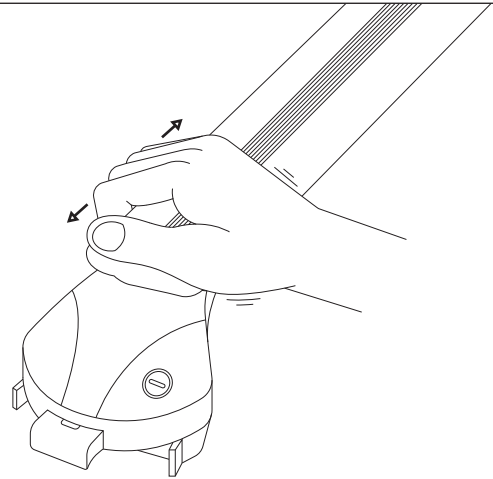


- 6 Check fitment is secure before using and also every 200 miles, to be sure the roof bars is stable, and whether the individual elements do not unscrewed.


## Safety Notes



### You need to avoid:



Quick  
Acceleration



Bad  
roads



Heavy  
braking



Oversized  
loads



Improperly  
fastened loads



Uneven  
loading



Max  
load



Check  
fitment



### CONTACT

Email: [office@yogi24.co.uk](mailto:office@yogi24.co.uk)  
[www.yogi24.co.uk](http://www.yogi24.co.uk)  
[www.facebook.com/yogi24ltd](https://www.facebook.com/yogi24ltd)

### YOGI24 LTD

East Belfast Enterprise Centre, 68-72 Newtownards Road  
BT4 1GW Belfast, Northern Ireland