


Fitting Instructions


Model: 10UN




Parts:

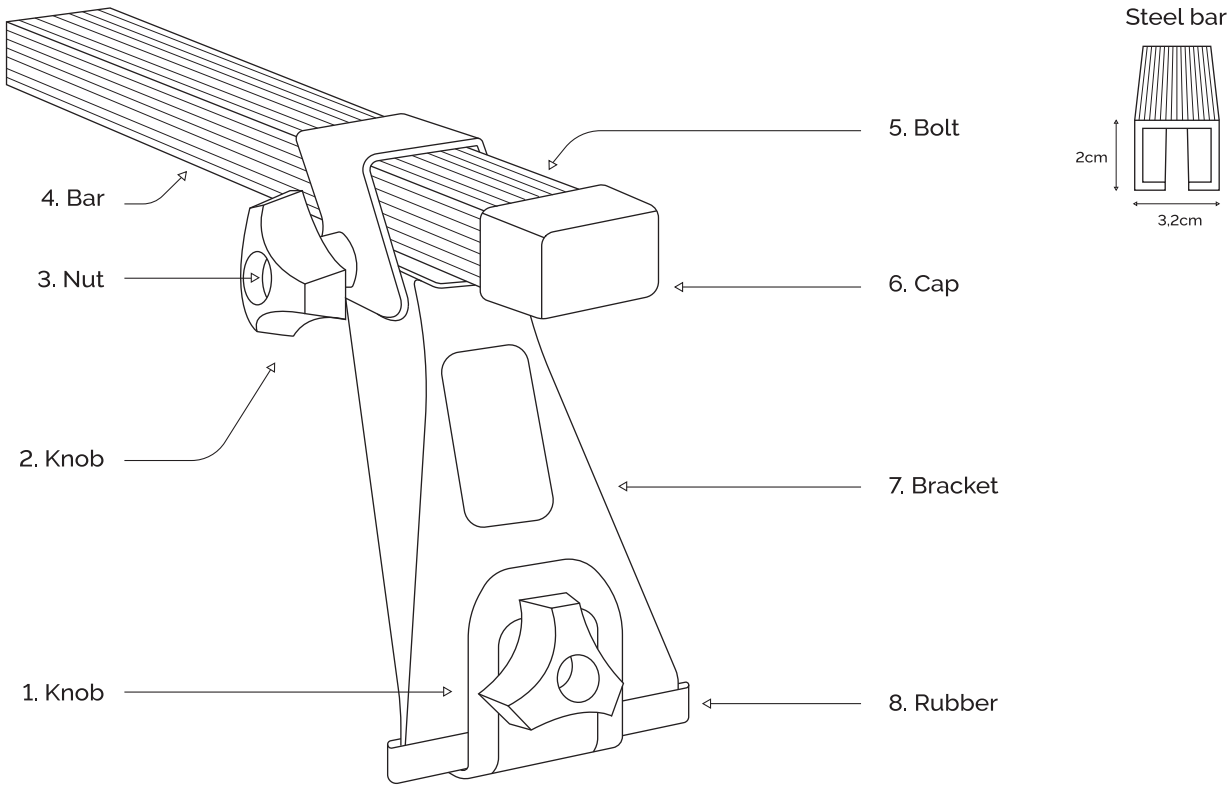


Manual:

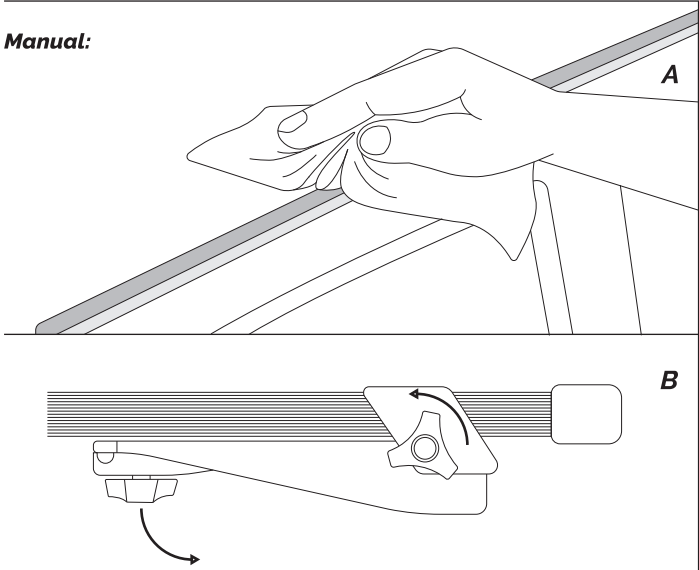


- 1 A Clean a place of assembly.
B Loosen both plastic knobs

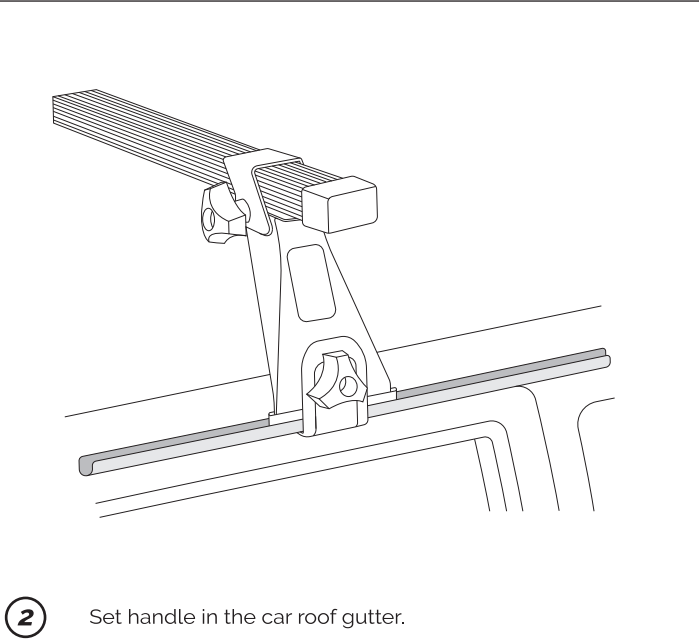


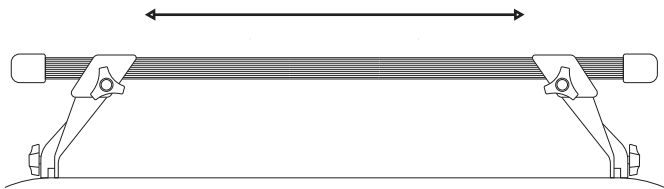


- 3 Centralise bars on the vehicle, provide a symmetrical crossbar position

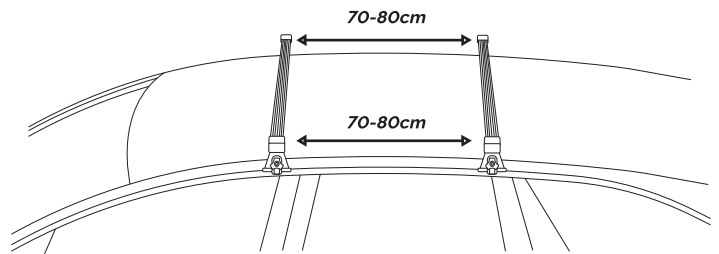

- 4 To minimize the noise please set the bars forward or back while maintaining a distance of 70-80cm between bars.

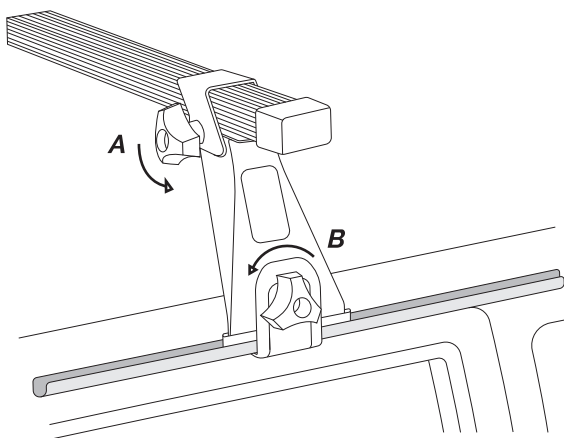

- 5 Tighten knob **A**, then knob **B**. Repeat the procedure. Tighten knob **B**, pull the bar from other side and then tighten knob **A**.

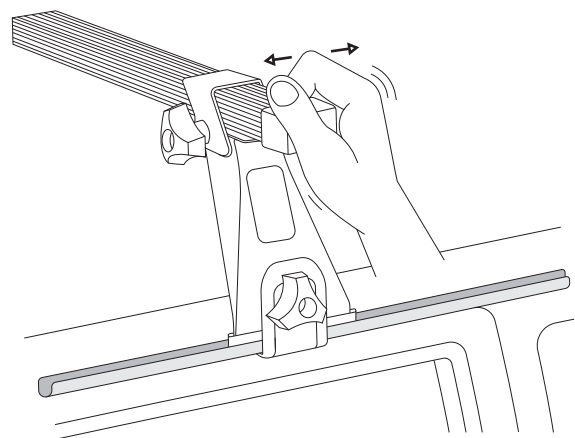

- 6 Check fitment is secure before using and also every 200 miles, to be sure the roof bars is stable, and whether the individual elements do not unscrewed.


Safety Notes



You need to avoid:



Quick
Acceleration



Bad
roads



Heavy
braking



Oversized
loads



Improperly
fastened loads



Uneven
loading



Max
load



Check
fitment



CONTACT

Email: office@yogi24.co.uk
www.yogi24.co.uk
www.facebook.com/yogi24ltd

YOGI24 LTD

East Belfast Enterprise Centre, 68-72 Newtownards Road
 BT4 1GW Belfast, Northern Ireland